



I.L. MOTORSPORT

Installation Instruction

Foot Pedal Set NA / NB


NA0-0145 / NB0-0145

Remove the original rubber from the brake / clutch pedal.


Now you can start installing the I.L. Pedal Set.

Hold the foot rest plate on to the original footrest and mark the mounting holes.

With a 3mm drill bit, drill the marked positions. Fixate the foot plate on the original footrest with the supplied fittings.

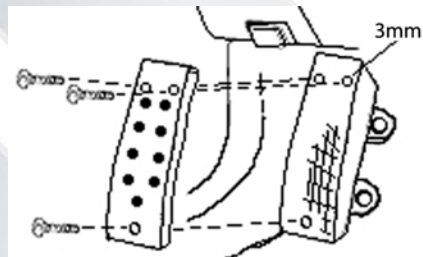


The pedal plate is placed on the gas pedal and fixated with the supplied screws (M5 x 20mm)

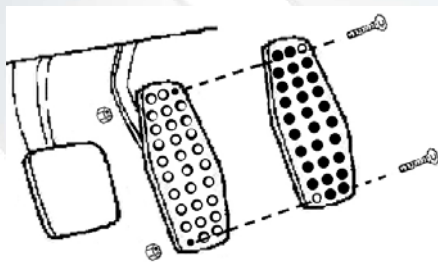


The clutch and brake pedal cover are installed as follows.

Slide the cover on to the bottom of the pedal plate.

Use a small screwdriver to pry the rubber on to the top part of the pedal plate

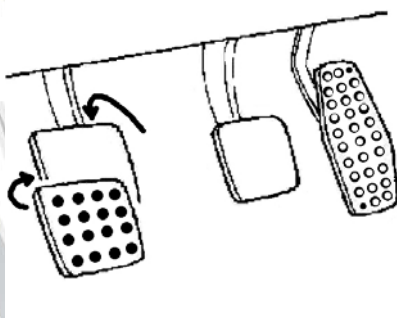


NA-Pedalset

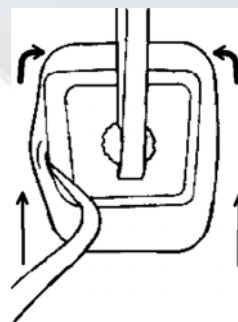

NB-Pedalset



Copyright by I.L. Motorsport

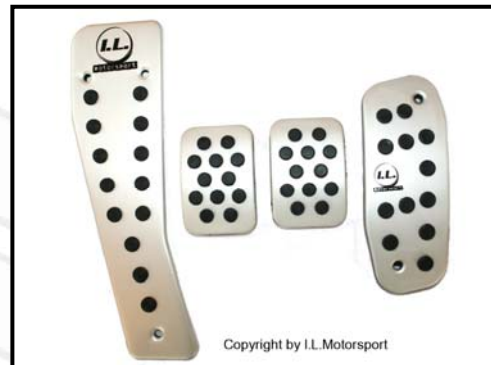

Copyright by I.L. Motorsport